


CRESCENT Ceiling Surfaced Downlight

Art Number WL221062 **Model** 18W 220-240VAC

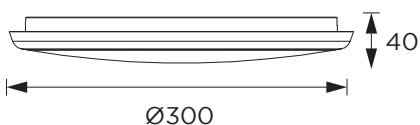

Features

- CRESRNT series downlight adopts high lumen SMD LED as a light source
- Body made with extruded aluminum
- Fire rated PC diffuser with even light output
- IP54 waterproof structural design and ideal replacement for damp location
- Up to 70% energy saving compared to standard CFL
- Emergency function with smart IC control which switched automatically once the power is switched off.
- Availabel in Four different size and wattage
- Dimmable with 0-10V, Dali and Triac. other dimming will availabel upon the request

Product Specification

LED Chip	SMD LED
Power	18W
Input	220-240VAC
Output	1910lm(2700K)/2005lm(4000K)/ 2105lm(5000K)
CCT	2700K(27)/ 4000K(40)/ 5000K(50)
Driver	Philips/ Tridonic

Technical Data

IP Rating	IP54
Housing	Extruded aluminum
Diffuser	PC
Finishing	White with sand(02)/ Black with sand(04) grey with sand(07)
Weight	0.80Kg
Package	10pcs/CTN
Power Factor	PF>0.9

Photometric Data

CRI	90
Luminous Efficacy	106lm/W
Beam Angle	120°(120)
Operating Temp.	-20°C~+35°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL221022	PAW(02)	60°(60)	2700K(27)
WL221022.02.60.27			

Photometric Data

