

SERIES ECO V3

High Bay 150W IP65

Art Number
WL441008

Model
150W



Features

ECO V3 Series LED highbay light adopts high lumen efficiency LED as light source.

Adopts UFO shape classic circular design.

Eco v3 cost effective version available in 80W, 100W, 120W and 150W


PC lens veils delivering 60°, 90°, 100° distribution patterns are designed to be used as interchangeable part to fulfill the urgent

Outstanding performance on heat management is attributable to the omnidirectional nature of tree like fins allowing air streams to enter and exit from all directions.

1-10V, Dali, dimming available

Product Specification


LED Chip	Epistar/ Tiandian
Power	150W
Input	100-277 VAC
Output	25500lm - 27000lm
CCT	3000K(30)/ 4000K(40)/ 6000K(60)/ 6500K(65)
Driver	Philips
SDCM	<5

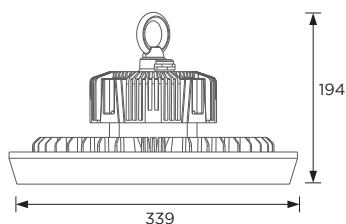

Technical Data

IP Rating	IP65
IK Rate	IK10
Housing	Die cast aluminum
Finishing	Powder coated black PAB (04)
Lens	Polycarbonate
Power Cable	H05RN-F 3x0.75 mm ² / L=0.5m (high voltage)
Mounting	U shape Bracket/ Suspension Hook

Light Distribution

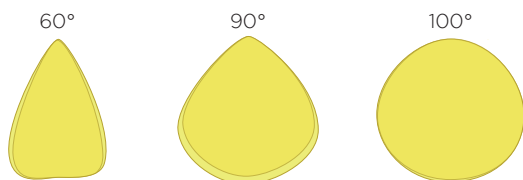

Photometric Data

CRI	70
Luminous Efficacy	150lm/W
Beam Angle	60°(60)/ 90°(90)/ 100°(100)
UGR	<25
Operating Temp.	-30°C-+50°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL441000	PAB(04)	60°(60)	3000K(30)
WL441000.04.60.30			