




Art Number	Model
WM991018	IP20
WM991019	IP65
WM991020	IP68
WM991045	IP67



## Features

- Adopts High quality EPISTAR SMD5050 LED as a light source
- Available RGB 3 in 1
- High brightness, low decay, stable quality
- Double layer copper flexible white PCB for good heat dissipation
- Good electricity and good conductivity
- Strong adhesive 3M double face tape for easy installation
- Every 10cm (6 LED) cutting mark, which helps you custom the length
- High operating temperature upto 50°C
- Available in IP20, IP65, IP67, IP68


## Ingress Protection Structure




## Technical Data

Product Code	Power	Input	Lumen	CRI	LED/m	Beam Angle	Width	Length	IP Rate
WM991018	14.4W/m	24VDC	648lm/m	-	60	120°	10mm	5m/Roll	IP20
WM991019	14.4W/m	24VDC	648lm/m	-	60	120°	10mm	5m/Roll	IP65
WM991020	14.4W/m	24VDC	648lm/m	-	60	120°	12mm	5m/Roll	IP68
WM991045	14.4W/m	24VDC	648lm/m	-	60	120°	12mm	5m/Roll	IP67

## 5050 300led White PCB



## Suitable Profiles

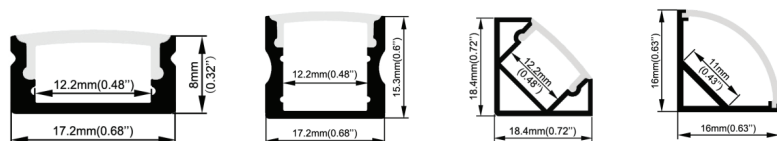

## Order Code Example

Artnumber: WM991000  
 Color Temp: 2700K(27)  
 IP Rating: IP20(20)  
 Order Code: WM991000.27.20