



Art Number	Model
WM991061	IP20
WM991062	IP65
WM991063	IP67
WM991064	IP68



Features

- Adopts High lumen EPISTAR SMD2835 LED as a light source
- Available Tunable CCT 2700K+6000K
- High brightness, low decay, stable quality
- Double layer copper flexible white PCB for good heat dissipation
- Good electricity and good conductivity
- Strong adhesive 3M double face tape for easy installation
- Every 5cm (6 LED) cutting mark, which helps you custom the length
- High operating temperature upto 50°C
- Available in IP20, IP65, IP67, IP68
- Lumen efficacy may varies as per the color temperature


Ingress Protection Structure




Technical Data

Product Code	Power	Input	Lumen	CRI	LED/m	Beam Angle	Width	Length	IP Rate
WM991061	24W/m	24VDC	2160lm/m	80+	120	120°	10mm	5m/Roll	IP20
WM991062	24W/m	24VDC	2160lm/m	80+	120	120°	10mm	5m/Roll	IP65
WM991063	24W/m	24VDC	2160lm/m	80+	120	120°	12mm	5m/Roll	IP68
WM991064	24W/m	24VDC	2160lm/m	80+	120	120°	12mm	5m/Roll	IP67

2835 600led White PCB



Suitable Profiles

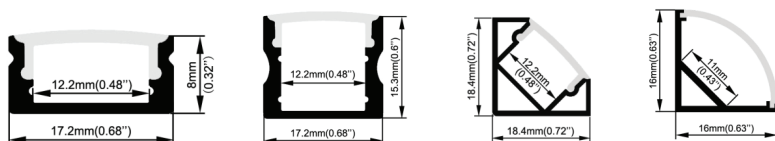

Order Code Example

Artnumber: WM991000
 Color Temp: 2700K(27)
 IP Rating: IP20(20)
 Order Code: WM991000.27.20