



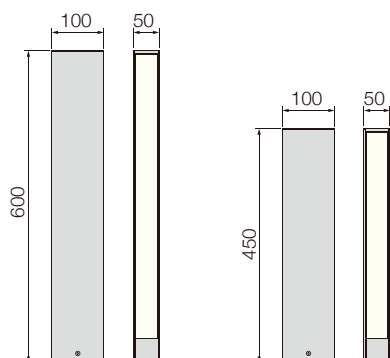

Art Number	Model
WL921023	15W 100-240VAC H450
WL921024	24W 100-240VAC H600

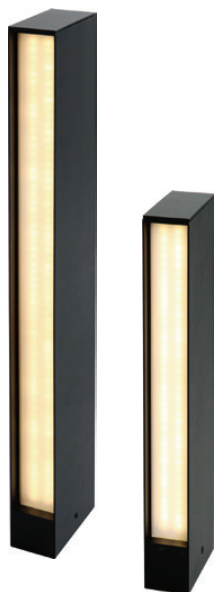

Features

POLLEY linear pole bollard light adopts SMD led as a light source.
 Made of robust design die-cast aluminium cover, extruded aluminium pole.
 The surface anti ageing spray process
 PMMA diffuser as the optical system
 Luminaires with light emission on one side or two sides.
 Impressive at night with their vertical light surfaces and convincing during the day with their high-contrast design
 It is giving the visually treat the illuminating in the public areas.
 IP65 fixture is suitable in outdoor, public and landscape lighting applications.

Product Specification


LED Chip	SMD LED
Power	15W/ 24W
Input	100-277VAC
Output	820lm/ 1320lm
CCT	2700K(27)/ 3000K(30)/ 4000K(40)/ 6000K(60)
LED Qty	168pcs/ 240pcs

Technical Data


Power Factor	>0.9
IP Rating	IP65
IK Rating	IK08
Housing	Die cast aluminum, extruded aluminum pole
Finishing	Black(04), Grey(06)
Diffuser	PMMA
Power Cable	H05RN-F 3x0.75 mm ² / L=0.5m (high voltage)
Mounting	Mounting plate with luminaire inside two screw

Photometric Light Distribution

15W



24W



Photometric Data

CRI	80
Luminous Efficacy	54-55lm/W
Beam Angle	Radial 2 Side (R2)
Operating Temp.	-35°C~+55°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL921023	BL(04)	Diffused(D)	3000K(30)
WL921023.04.D.30			