


Art Number WL921027 **Model** 20W 100-240VAC H1000

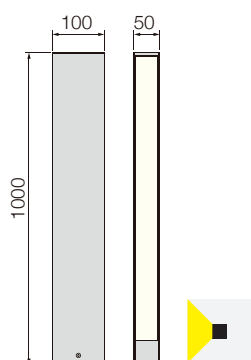

Features

POLLEY linear pole bollard light adopts SMD led as a light source.
 Made of robust design die-cast aluminium cover, extruded aluminium pole.
 The surface anti ageing spray process
 PMMA diffuser as the optical system
 Luminaires with light emission on one side or two sides.
 Impressive at night with their vertical light surfaces and convincing during the day with their high-contrast design
 It is giving the visually treat the illuminating in the public areas.
 IP65 fixture is suitable in outdoor, public and landscape lighting applications.

Product Specification

LED Chip	SMD LED
Power	20W
Input	100-277VAC
Output	1400lm
CCT	2700K(27)/ 3000K(30)/ 4000K(40)/ 6000K(60)
LED Qty	240pcs

Technical Data

Power Factor	>0.9
IP Rating	IP65
IK Rating	IK08
Housing	Die cast aluminum, extruded aluminum pole
Finishing	Black(04), Grey(06)
Diffuser	PMMA
Power Cable	H05RN-F 3x0.75 mm ² / L=0.5m (high voltage)
Mounting	Mounting plate with luminaire inside two screw

Photometric Data

CRI	80
Luminous Efficacy	70lm/W
Beam Angle	Radial 1 Side (R1)
Operating Temp.	-35°C~+55°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL921027	BL(04)	Radial(R1)	3000K(30)
WL921027.04.R1.30			