

# FLEXI STRIP 4.8W/m Single Color 90lm

Art Number	Model
WM991000	IP20
WM991001	IP65
WM991002	IP68
WM991039	IP67



## Features

- Adopts High lumen EPISTAR SMD2835 LED as a light source
- Available CCT 2700K, 3000K, 4000K, 5000K, 6000K, RED, GREEN, BLUE
- High brightness, low decay, stable quality
- Double layer copper flexible white PCB for good heat dissipation
- Good electricity and good conductivity
- Strong adhesive 3M double face tape for easy installation
- Every 10cm (6 LED) cutting mark, which helps you custom the length
- High operating temperature upto 50°C
- Available in IP20, IP65, IP67, IP68

## Ingress Protection Structure




## Technical Data

Product Code	Power	Input	Lumen	CRI	LED/m	Beam Angle	Width	Length	IP Rate
WM991000	4.8W/m	24VDC	432lm/m	80+	60	120°	8mm	5m/Roll	IP20
WM991001	4.8W/m	24VDC	432lm/m	80+	60	120°	8mm	5m/Roll	IP65
WM991002	4.8W/m	24VDC	432lm/m	80+	60	120°	10mm	5m/Roll	IP68
WM991039	4.8W/m	24VDC	432lm/m	80+	60	120°	10mm	5m/Roll	IP67

## 2835 300led White PCB



## Suitable Profiles

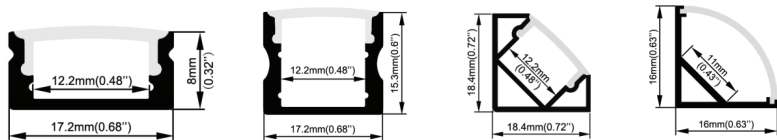

## Order Code Example

Artnumber: WM991000  
 Color Temp: 2700K(27)  
 IP Rating: IP20(20)  
**WM991000.27.20**